

**Series 6, built-under fridge, 82 x 60 cm, flat hinge  
KUR15AFF0**



**Included accessories**

1 x egg tray

**The built-under refrigerator with MultiBox: ideal storage location for your fresh fruits and vegetables.**

- **LED interior light:** Illuminates the refrigerator evenly and glare-free, and lasts for its entire life.

**Technical Data**

Gross weight: 82.000 lbs

Energy Efficiency Class (Regulation (EU) 2017/1369): F

Average annual energy consumption in kilowatt hour per year (kWh/a) (EU) 2017/1369: 114 kWh/annum

Sum of volume of frozen compartments (EU 2017/1369): 0 l

Sum of volume of chill compartments (EU 2017/1369): 137 l

Airborne acoustical noise emissions (EU 2017/1369): 38 dB(A) re 1 pW

Airborne acoustical noise emission class (EU 2017/1369): C

Built-in / Free-standing: Built-in

Number of compressors: 1

Number of independent cooling systems: 1

Width of the appliance: 598 mm

Height: 820 mm

Depth of the product: 548 mm

Net weight: 34.4 kg

Required niche size for installation (HxWxD): 820 x 600 x 550 mm

Door panel options: Possible but accessory

Door hinge: Right reversible

Number of Adjustable Shelves in fridge compartment: 2

Shelves for Bottles: No

Frost free system: No

Interior ventilator: No

Reversible Door Hinge: Yes

Length electrical supply cord: 230 cm

Noise level: 38 dB(A) re 1 pW

Multi-Flow Air Tower: No

Economy setting: No

Cold technology: 1 compressor/1 cold circuit

Fast cooling switch: No

Temperature Controlled Drawer: No

Humidity Control Drawer: No

Number of Door Bins - Refrigerator: 3

Door bin adjustability - Refrigerator: No

Tilt-out door bins in fridge: Yes

Gallon wide door bins: Yes

Number of Gallon storage: 3

No. of shelves in fridge: 3

Motorized Shelf: No

Material of the shelves: Glas, plastic

Door opened indicator freezer: No

Connection Rating: 90 W

Fuse protection: 10 A

Voltage: 220-240 V

Frequency: 50 Hz

Approval certificates: CE, VDE

Main colour of product: N/A

Door panel options: Possible but accessory

Installation typology: Built-under

Noise level: 38 dB(A) re 1 pW

Energy Star Qualified: No

Plug type: GARDY plug w/ earthing

Required cutout/niche size for installation (in): x x

Dimensions of the packed product: 35.03 x 26.37 x 24.40

Net weight: 76.000 lbs



## **Series 6, built-under fridge, 82 x 60 cm, flat hinge KUR15AFF0**

**The built-under refrigerator with MultiBox:  
ideal storage location for your fresh fruits  
and vegetables.**

---

### **Performance and consumption**

- can be built under/between, fully integr

### **Design and Styling**

- Ventilation in plinth, no cut-out in the worksurface necessary
- Easy clean interior

### **Convenience & Safety**

- Electromechanical temperature control
- Automatic defrost in fridge section

### **Fridge Compartment**

- 3 safety glass shelves, of which 2 are height adjustable
- 3 door trays
- Bottle holder in x-deep door tray
- LED interior light

### **Freshness System**

- 2 MultiBox drawers - Transparent drawers with a corrugated bottom, ideal for storing fruits and vegetables.

### **Technical Information**

- Door right hinged, reversible
- Connected load: 90 W
- Nominal voltage: 220 - 240 V

### **Dimensions**

- Niche Dimension (H x W x D): 82.0 cm x 60.0 cm x 55.0 cm
- Dimensions ( H x W x D): 82.0 cm x 59.8 cm x 54.8 cm

### **Accessories**


- egg tray

### **Country Specific Options**

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

### **General Information**


## Series 6, built-under fridge, 82 x 60 cm, flat hinge KUR15AFF0

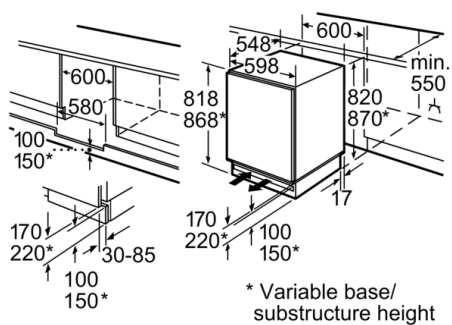

Space for electrical connection next to the appliance on the left or right-hand side.  
Ventilation space in the base.


Measurements in mm

measurements in mm  
Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.



### Maximal permissible weight of the unit fronts

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

- A: Weight
- A: Appliance door height including hinges in mm
- B: Undamped hinge, unit front in kg
- C: Damped hinge, unit front in kg

A	B	C
1500-1750	22	22
720-1400	19	19
A1	15	19
A2	15	19