


**Series 8, Built-in warming drawer, 60 x 14 cm, Stainless steel  
BIC630NS1B**

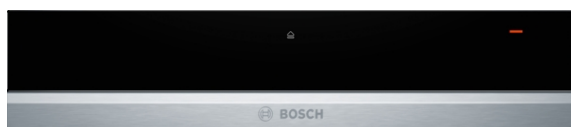

**The multifunctional warming drawer for the 14 cm niche: for pre-heating plates, keeping food warm and low temperature cooking.**

- **Push-pull mechanism:** easy opening and closing thanks to a practical spring mechanism.
- **Cleaning convenience:** easy to clean hotplate made of tempered glass.

---

**Technical Data**

Built-in / Free-standing : Built-in  
 Color / Material Front : Stainless steel  
 Maximum number of plates : 12  
 Maximum number of espresso cups : 64  
 Dimensions : 140 x 594 x 548 mm  
 Dimensions of the packed product (HxWxD) : 200 x 640 x 660 mm  
 Required niche size for installation (HxWxD) : 140 x 560 x 550 mm  
 : 0.810 kW  
 Time control : No  
 Electrical connection rating : 810 W  
 Fuse protection : 10 A  
 Voltage : 220-240 V  
 Frequency : 60; 50 Hz  
 Plug type : GB plug  
 Color / Material Front : Stainless steel  
 Approval certificates : , CE, E17D UKCA marking, VDE  
 Required cutout/niche size for installation (in) : x x  
 Appliance Dimensions (h x w x d) (in) : x x  
 Dimensions of the packed product : 7.87 x 25.19 x 25.98  
 Net weight : 36.000 lbs  
 Gross weight : 39.000 lbs  
 Length electrical supply cord : 150 cm  
 Required niche size for installation (HxWxD) : 140 x 560 x 550 mm  
 Dimensions : 140 x 594 x 548 mm  
 Dimensions of the packed product (HxWxD) : 200 x 640 x 660 mm  
 Net weight : 16.3 kg  
 Gross weight : 17.5 kg

---



**Series 8, Built-in warming drawer, 60 x 14  
cm, Stainless steel  
BIC630NS1B**

**The multifunctional warming drawer for the  
14 cm niche: for pre-heating plates, keeping  
food warm and low temperature cooking.**

---

**Design:**

**Comfort:**

- Rotary Control
- User-friendly electronics: extremely easy and comfortable operation
- Heating plate made of toughened glass
- Cavity volume: 20 l
- Loading up to 25 kg
- Max. loading espresso cups: 64 PC or Max. loading plates: 12 PC
- 5 functions: dough proving thawing of delicate foods keeping drinks and food warm pre-warming of crockery gentle cooking
- Temperature control in 4 levels: ca. 40 °C - 80 °C (glass surface temperature)
- Opening without handle (push&pull)

**Technical Information**

- Length of mains cable: 150 cm
- Total connected load electric: 0.81 KW
- Nominal voltage: 220 - 240 V

**Dimensions:**

- Appliance dimension (hwxwd): 140 mm x 594 mm x 548 mm
- Niche dimension (hwxwd): 140 mm x 560 mm - 568 mm x 550 mm
- "Please reference the built-in dimensions provided in the installation drawing"

**Series 8, Built-in warming drawer, 60 x 14**  
**cm, Stainless steel**  
**BIC630NS1B**

