

## iQ500, French Door Bottom freezer, multiDoor, 183 x 91 cm, Black stainless steel KF96NAXEA



French door with cross door and hyperFresh <0°C> freshness system: perfect storage conditions for fish and meat as well as fruits and vegetables

- ✓ Easily find the best possible place for each individual food - Smart storage management.
- ✓ noFrost – Never defrost your freezer again.
- ✓ Home Connect – Control your smart fridge no matter where you are.
- ✓ LED light – Ample, even lighting helps you check what's in your fridge faster.
- ✓ Reduces the temperature for a set time to quickly cool down fresh food items - superCooling.

### Features

#### Technical Data

Energy Efficiency Class: E

Average annual energy consumption in kilowatt hour per year (kWh/a): 333 kWh/annum

Sum of volume of frozen compartments: 200 l

Sum of volume of chill compartments: 405 l

Airborne acoustical noise emissions : 38 dB(A) re 1 pW

Airborne acoustical noise emission class: C

Built-in / Free-standing: Free-standing

Door panel options: Not possible

Width of the appliance: 910 mm

Depth of the product: 731 mm

Net weight: 118.3 kg

Fuse protection: 10 A

Door hinge: left and right

Voltage: 220-240 V

Frequency: 50-60 Hz

Approval certificates: CE

Length electrical supply cord: 240 cm

Storage Period in Event of Power Failure (h): 15 h

Number of compressors: 1

Number of independent cooling systems: 1

Interior ventilator: Yes

Reversible Door Hinge: No

Number of Adjustable Shelves in fridge compartment: 3

Shelves for Bottles: No

Installation typology: N/A

Type of hinge: Flush-folding



**iQ500, French Door Bottom freezer,  
multiDoor, 183 x 91 cm, Black stainless  
steel  
KF96NAXEA**

#### Features

##### Performance and consumption

- EU19\_EEK\_D: E
- Total Volume : 605 l
- Net Fridge Volume : 405 l
- Net Freezer Volume : 200 l
- Freezing capacity 24h: 13 kg
- Annual Energy Consumption: 333 kWh/a
- Climate Class: SN-T
- Fast Freeze Facility
- Noise Level : 38 dB , EU19\_Noise emission class\_D: C

##### Design and Styling

- Doors black inox-antifingerprint, side panels cast iron
- Classic door , Door black inox-antifingerprint, side panels cast iron
- LED interior light in fridge section
- Metal backwall with multi airflow
- Interior with metal applications

##### Convenience & Safety

- Home Connect enabled via WLAN
- 7 segment electronic control
- Super Cooling: automatic deactivation
- Automatic defrost in fridge section
- Acoustic open door warning system, Optical warning system Door open
- Acoustic Warning System, Warning System by temperature increase

##### Fridge Compartment

- Multi Airflow-System
- 2 door shelf large, 2 door shelf small
- Dairy compartment

##### Freshness System

- 1 hyperFresh ◀0°C▶ box - fish and meat stay fresh for longer.
- 1 hyperFresh box with adjustable humidity on wheels - keeps fruit and vegetables fresh for longer.

##### Freezer Section

- 6 transparent freezer drawers
- Ice cube tray
- Without Illumination in freezer section

##### Dimensions

- Appliance Dimensions ( H x W x D): 183 cm x 91 cm x 73.1 cm

##### Technical Information

- 4 wheels for easier transport, 3 of them height adjustable.
- Nominal voltage: 220 - 240 V

##### Accessories

##### Country Specific Options


- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the attached distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.
- Net 4\* compartment volume : 200 l

- Acoustic Warning System
- 2 door trays high
- LED interior light
- noFrost

iQ500, French Door Bottom freezer,  
multiDoor, 183 x 91 cm, Black stainless  
steel  
KF96NAXEA


Dimensioned drawings

measurements in mm

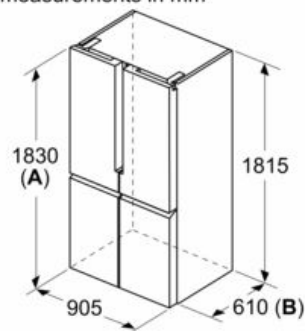


**A:** Front is adjustable from 1830 to 1847,  
with front levelling feet fully extended  
**B:** Add 25 for fixed spacers on back

measurements in mm

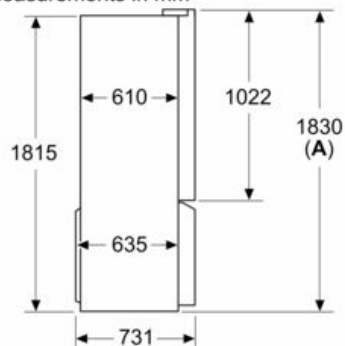


**A:** Front is adjustable from 1830 to 1847,  
with front levelling feet fully extended

measurements in mm

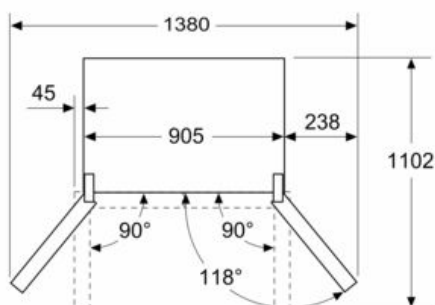

measurements in mm

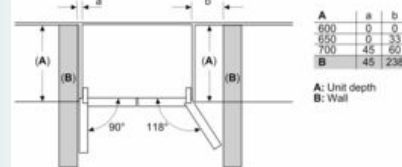

A	a	b
600	0	0
650	0	33
700	45	60
<b>B</b>	45	238

**A:** Unit depth  
**B:** Wall