

## Series 8, Flex induction hob, 80 cm PXV875DC1E



HEZ390012 Steaming Rack for Stainless Steel roaste, HEZ390090 Wok Set consisting of 3 Items, HEZ390210 System pan diameter 15 cm, HEZ390220 System pan diameter 19 cm, HEZ390230 System pan diameter 21cm, HEZ390512 Teppan Yaki (large), HEZ390522 Griddle Plate, HEZ394301 Connecting strip, HEZ9ES100 Espresso maker 4 cups, HEZ9FE280 Iron pan Ø 18 / 28 cm, HEZ9FF010 Flex Pan, large, HEZ9FF030 Flex Pan set, 3 pcs., HEZ9FF040 Flex Pan set, 4 pcs., HEZ9SE040 4 pieces Set, HEZ9SE060 6 pieces Set, HEZ9TY010 Teppan Yaki, HZ390011 Stainless Steel roaster with glas lid


- **DirectSelect Premium:** Direct, simple selection of the desired cooking zone, power and additional functions.
- **FlexInduction Zone:** Get more flexibility by combining the cooking zones into one big zone for placing small pots and large cookware.
- **PerfectFry:** For perfect browning of roasted foods thanks to sensor control with 5 power levels.
- **ComfortProfile:** Elegant, appealing design with bevelled front and metal strips on the side.
- **MoveMode:** the automatic setting of cooking levels allows fast boiling on the front, cooking on the middle and simmering on the rear cooking zone.

Product name/family: ..... Cooking zone ceramic  
Built-in / Free-standing: ..... Built-in  
Energy input: ..... Electric  
Total number of positions that can be used at the same time: ..... 5  
Min. required niche size for installation (HxWxD): ..... 51 x 750-780 x 490-500 mm  
Width of the appliance: ..... 816 mm  
Dimensions: ..... 51 x 816 x 527 mm  
Dimensions of the packed product (HxWxD): ..... 126 x 953 x 603 mm  
Net weight: ..... 14.8 kg  
Gross weight: ..... 18.5 kg  
Residual heat indicator: ..... yes  
Location of control panel: ..... Hob front  
Basic surface material: ..... Ceramic  
Color of surface: ..... Alu, brushed, Black  
Length electrical supply cord: ..... 110.0 cm  
Sealed Burners: ..... No  
Power Boost: ..... All cooking zones  
Power of heating element (kW): ..... 1.8 kW  
Power of 3rd heating element (kW): ..... 1.4 kW  
Power of heating element (kW in boost): ..... [3.1] kW  
Power of 3rd heating element (kW in boost): ..... [2.2] kW  
Connection rating: ..... 7400 W  
Voltage: ..... 220-240 V  
Main colour of product: ..... Black  
Energy input: ..... Electric  
Plug type: ..... No plug (electrical connection by electrician)  
Appliance Dimensions (h x w x d) (in): ..... x x  
Dimensions of the packed product: ..... 4.96 x 23.74 x 37.51  
Net weight: ..... 33.000 lbs  
Gross weight: ..... 41.000 lbs  
Total number of positions that can be used at the same time: ..... 5  
Length electrical supply cord: ..... 110.0 cm  
Min. required niche size for installation (HxWxD): ..... 51 x 750-780 x 490-500 mm  
Dimensions: ..... 51 x 816 x 527 mm  
Dimensions of the packed product (HxWxD): ..... 126 x 953 x 603 mm  
Net weight: ..... 14.8 kg  
Gross weight: ..... 18.5 kg




4 242002 871035

## Series 8, Flex induction hob, 80 cm PXV875DC1E

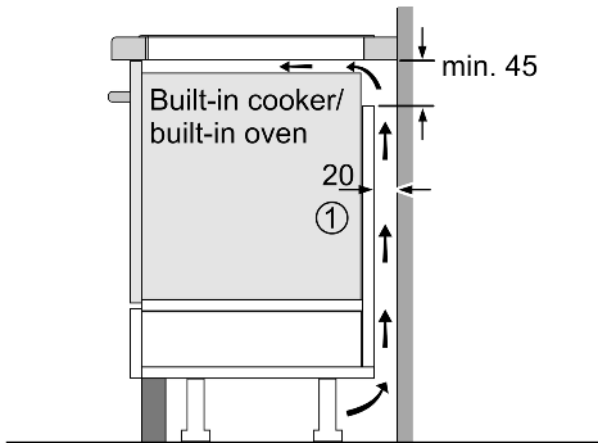


①  
Ventilation gap must  
be present

All measurements in mm

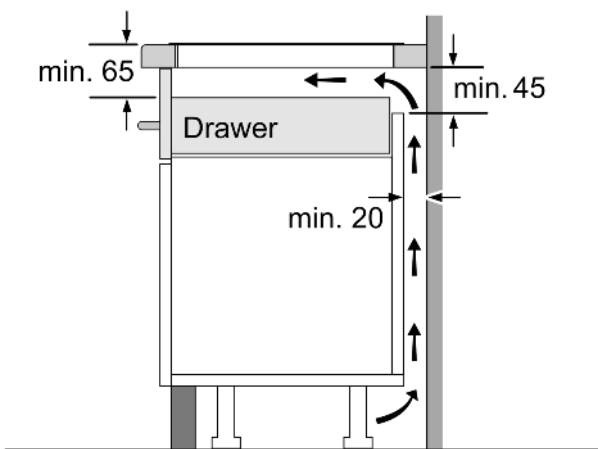

Measurements in mm



**A:** Minimum distance from the hob cut-out to the wall.  
**B:** Recessed depth  
**C:** The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

