

BEST 105




0	
Description	1-bowl sink
Model	BEST 105
Base (mm)	600
0	Inset
Dimensions (mm)	570 x 510
Hole for built-in installation (mm)	550 x 480
Number of Bowls	1
Bowl Depth (mm)	200

0	
Gross Weight (kg)	13,60
Net Weight (kg)	10,00
Packaging Dimension (kg)	690 x 575 x 300
0 (kg)	0,119

0	
Packaging	Cardboard and polyethylene
0	Space-saving siphon, integrated Flow Pro, rectangular overflow and hooks.

Technical Drawing

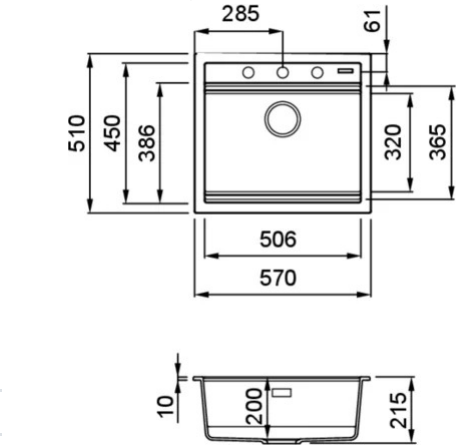

KERATEK[®] plus
CERAMIC NANOTECHNOLOGY CN6



LKB10586 K86
8032557029427



LKB10593 K93
8032861020462



LKB10595 K95
8032861020516



LKB10596 K96
8032861020479



LKB10597 K97
8032861020523



LKB10599 K99
8032861020530

METAL



LMB10573 M73
8031873119249



LMB10579 M79
8031873119256

MATT



LGB10578 G78
8032557066866



LGB10540 G40
8032557064930



LGB10543 G43
8032557064947



LGB10548 G48
8032557064954



LGB10568 G68
8032557064961

CLASSIC









LGB10551 G51
8032557065005



LGB10559 G59
8032557065012



LGB10562 G62
8032557065029

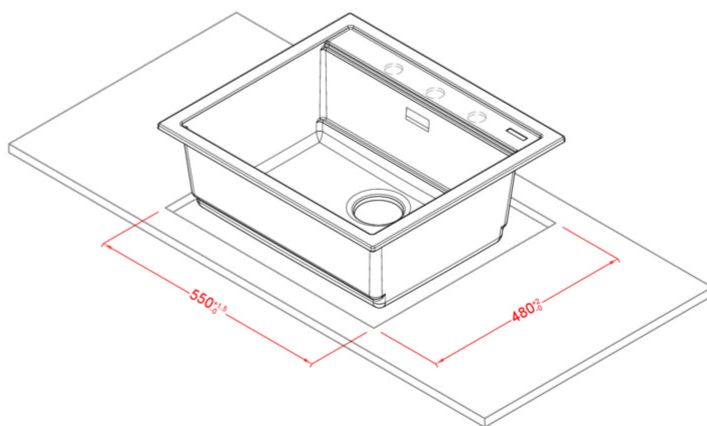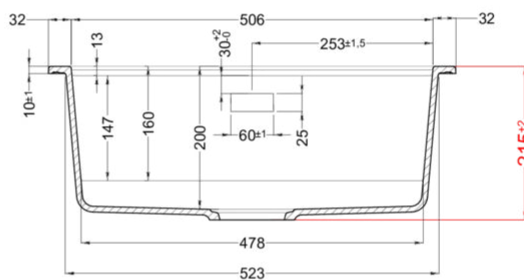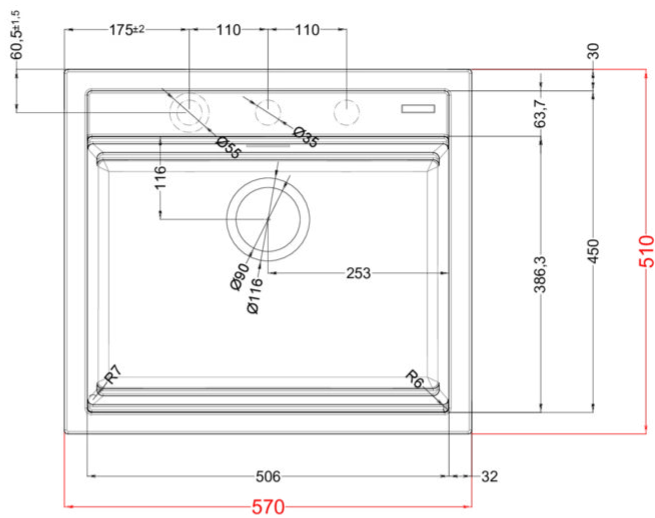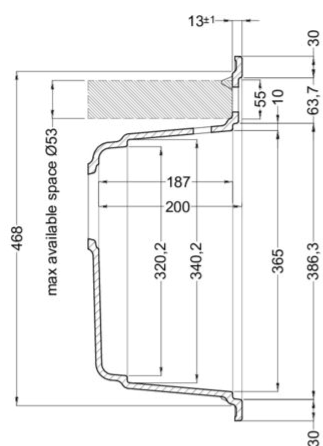

BEST 105

general tolerances where not expressly communicated $\pm 0.2\%$
connection dimensions according to UNI EN 695

