

Series 6, built-in freezer, 82 x 59.8 cm, soft close flat hinge GUN21ADE0



1 x ice cube tray

KFZ10AX0 Door panel with decor frame
KUZ20SX0 Attachment door, stainless steel

- **NoFrost:** never defrost again, thanks to perfect protection from ice formation - that saves time and effort.
- **Connectivity:** remotely monitor and control your fridge from your smartphone or tablet.

Energy Efficiency Class (Regulation (EU) 2017/1369): E
Average annual energy consumption in kilowatt hour per year (kWh/a) (EU) 2017/1369: 189 kWh/annum
Sum of volume of frozen compartments (EU 2017/1369): 85 l
Airborne acoustical noise emissions (EU 2017/1369): ..35 dB(A) re 1 pW
Airborne acoustical noise emission class (EU 2017/1369): B
Product category: Upright freezer
Built-in / Free-standing: Built-in
Frost free system: Fridge and freezer
Width of the appliance: 598 mm
Depth of the product: 548 mm
Dimensions of the packed product (HxWxD): 890 x 640 x 640 mm
Warning signal / malfunction: Visual
Cover door installation system: Fixed-mounted
Number of drawers/baskets (Stck): 3
Number of freezing flaps (Stck): 0
Lockable door: No
Light: No
Length electrical supply cord: 230.0 cm
Door hinge: Right reversible
Net weight: 31.1 kg
Gross weight: 33.8 kg
Multi-Flow Air Tower: No
Number of independent cooling systems: 1
Economy setting: Yes
Fast freezing switch: Yes
Door bin adjustability - Freezer: No
Tilt-out door bins in freezer: No
Door bin adjustability - Freezer: No
Reversible Door Hinge: Yes
Fuse protection: 10 A
Frequency: 50 Hz
Installation typology: Built-under
Energy Star Qualified: No
Plug type: GARDY plug w/ earthing
Required cutout/niche size for installation (in): x
Dimensions of the packed product: 35.03 x 25.19 x 25.19
Net weight: 68.000 lbs
Gross weight: 74.000 lbs
Included accessories: 1 x ice cube tray




4 242005 381111

Series 6, built-in freezer, 82 x 59.8 cm, soft close flat hinge GUN21ADE0

measurements in mm


Recommended gap dimensions for flat hinges




F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.

Measurements in mm

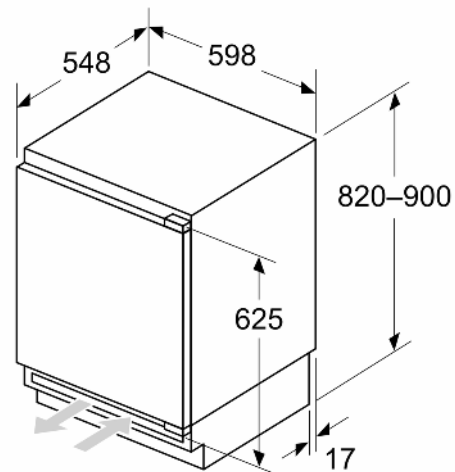

Measurements in mm




A: Substructure height

B: ≥ 560 mm (recommended)


Space for electrical connection next to the appliance on the left or right side

Measurements in mm

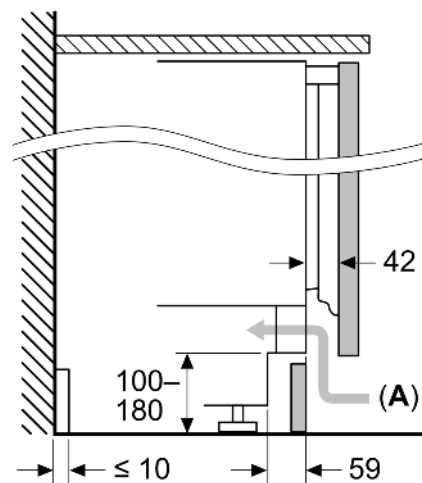

A: Air inlet ≥ 200 cm²

Maximal permissible weight of the unit fronts

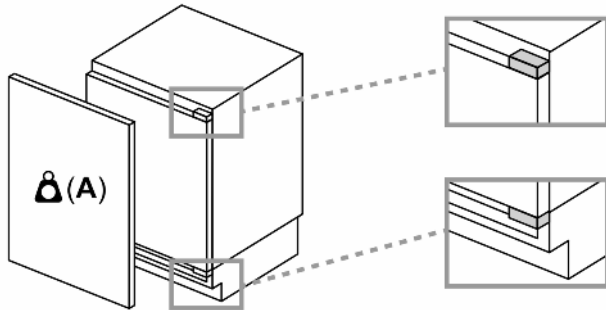

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

A: Weight ≤ 12 kg