

Series 6, Induction hob with integrated ventilation system, 80 cm, surface mount without frame PVQ811H26E



B

1 x Slider for unducted recirculation, 1 x Clean Air Plus odor filter


HEZ390090 Wok Set consisting of 3 Items, HEZ9ES100 Espresso maker 4 cups, HEZ9FE280 Iron pan Ø 18 / 28 cm, HEZ9SE030 Set of 2 pots and 1 pan, HEZ9SE040 4 pieces Set, HEZ9SE060 6 pieces Set, HEZ9VDKE1 Exhaust kit, HEZ9VDKR0 Recirculation kit 2 L-bow (70cm), HEZ9VDKR1 Recirculation kit S and L-bow (60cm), HEZ9VDKR2 Recirculation kit 1x L-bow, HEZ9VDSB1 90° flat duct bend horizontal, HEZ9VDSB2 90° flat duct L vertical, HEZ9VDSB3 90° flat duct M vertical, HEZ9VDSB4 90° flat duct S vertical, HEZ9VDSI0 Adapter round-flat, HEZ9VDSI1 90° Adapter round-flat, HEZ9VDSM1 Straight tube 500mm, HEZ9VDSM2 Straight tube 1000mm, HEZ9VDSS1 Connector sleeve (female), HEZ9VDSS2 Flex sleeve (female), HEZ9VEDU0 Acoustics Filter, HEZ9VRCR1 Clean Air Plus odor filter (replacement), HEZ9VRPD0 Basic kit (partly-)ducted recirculation, HEZ9VRPD1 Plinth Diffusor, HEZ9VRUD0 Kit Unducted Recirculation

Gross weight: 30.0 kg
 Product name/family: Cooking zone ceramic
 Built-in / Free-standing: Built-in
 Energy input: Electric
 Min. required niche size for installation (HxWxD): 223 x 750-750 x 490-490 mm
 Width of the appliance: 802 mm
 Dimensions: 223 x 802 x 522 mm
 Dimensions of the packed product (HxWxD): 431 x 950 x 672 mm
 Net weight: 23.6 kg
 Gross weight: 30.0 kg
 Residual heat indicator: yes
 Location of control panel: Front
 Basic surface material: Ceramic
 Color of surface: Black
 Length electrical supply cord: 110.0 cm
 Sealed Burners: No
 Power Boost: All cooking zones
 Power of 2nd heating element (kW): 3.6 kW
 Number of speed settings: 9-stage + 2 intensive
 Max. air extraction: 500 m³/h
 Boost position output recirculating: 595.0 m³/h
 Max. air recirculation: 487 m³/h
 Boost position air extraction: 622 m³/h
 Noise level: 69 dB(A) re 1 pW
 Odour filter: No
 Voltage: 220-240/380-415 V
 Frequency: 50-60 Hz
 Length electrical supply cord: 110.0 cm
 Min. required niche size for installation (HxWxD): 223 x 750-750 x 490-490 mm
 Dimensions: 223 x 802 x 522 mm
 Dimensions of the packed product (HxWxD): 431 x 950 x 672 mm
 Net weight: 23.6 kg
 Included accessories: 1 x Slider for unducted recirculation, 1 x Clean Air Plus odor filter





4 242005 433612


Series 6, Induction hob with integrated ventilation system, 80 cm, surface mount without frame PVQ811H26E

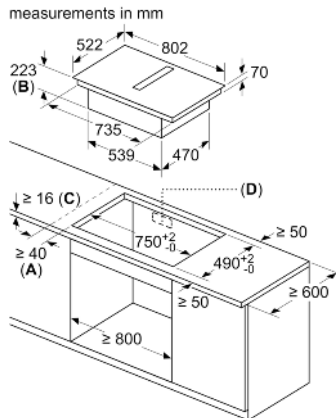

- A:** Minimum distance from the hob cut-out to the wall
B: Recessing depth
C: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.
D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

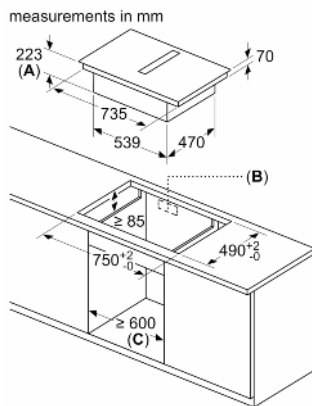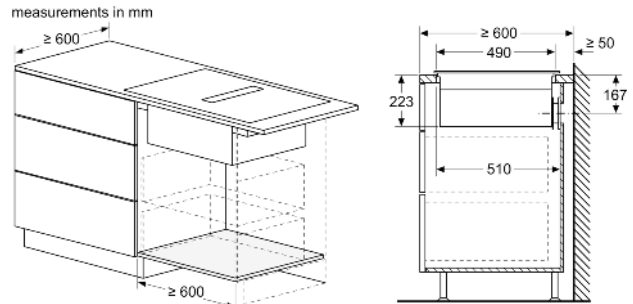

- A:** Recess depth
B: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.
C: All 80 cm width class models can be installed in 60 cm wide furniture by adjusting the side panels.






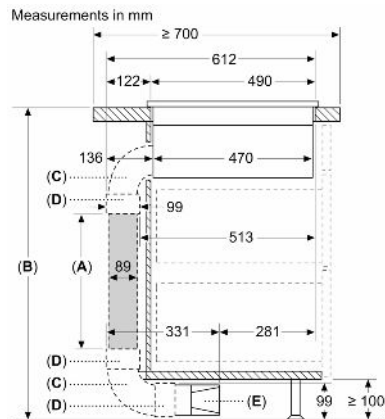



- A:** Tube length
B: Kitchen height
C: 90° L-size bow
D: Connector sleeve
E: Diffuser

Ducting kit available for ≥ 700 mm depth worktops and up to 960 mm height


The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 960
1000	> 960

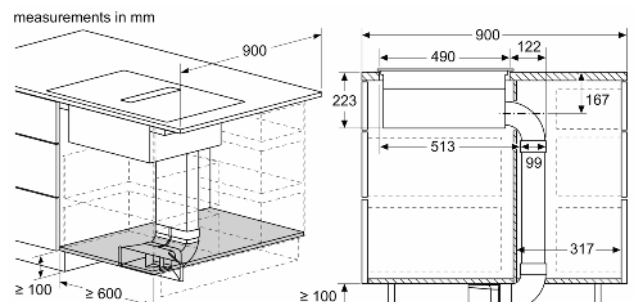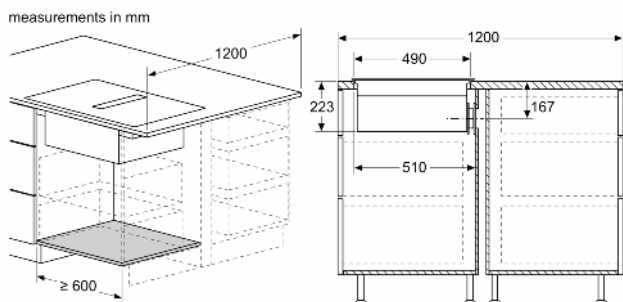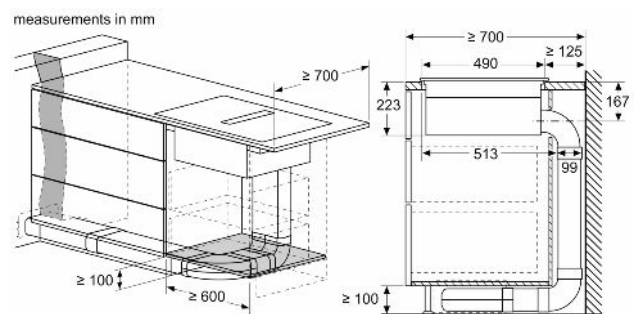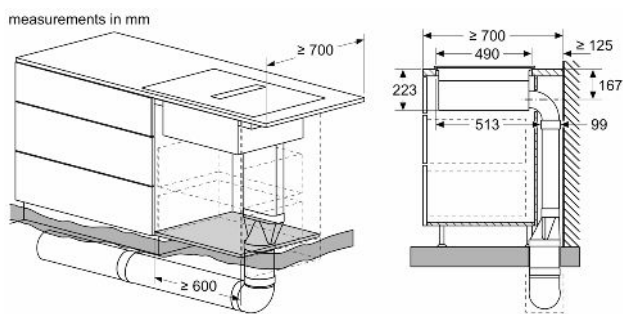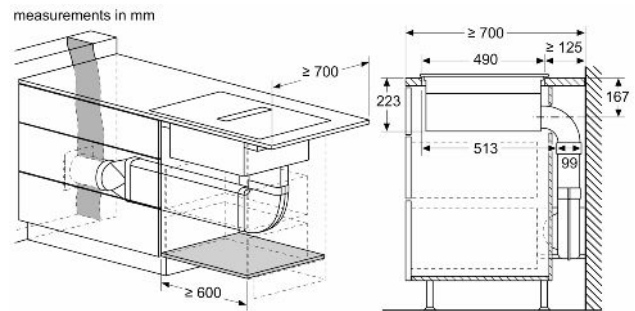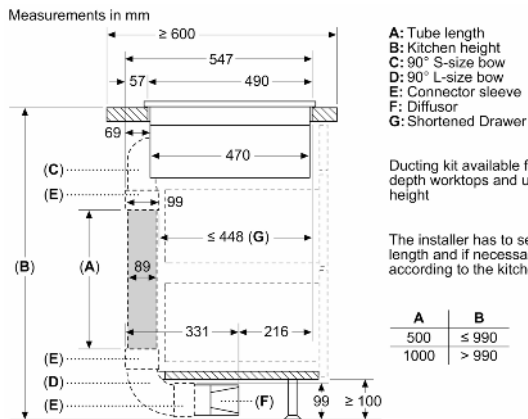


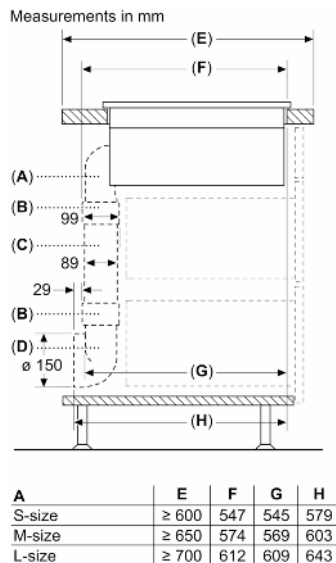

A: 90° Bow
 B: Connector sleeve
 C: Straight tube
 D: 90° Adapter round-flat

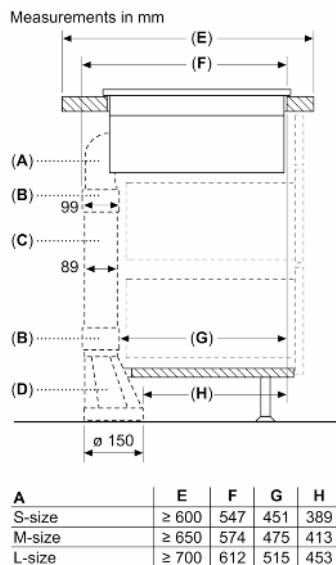


A: 90° Bow
 B: Connector sleeve
 C: Straight tube
 D: Straight adapter round-flat

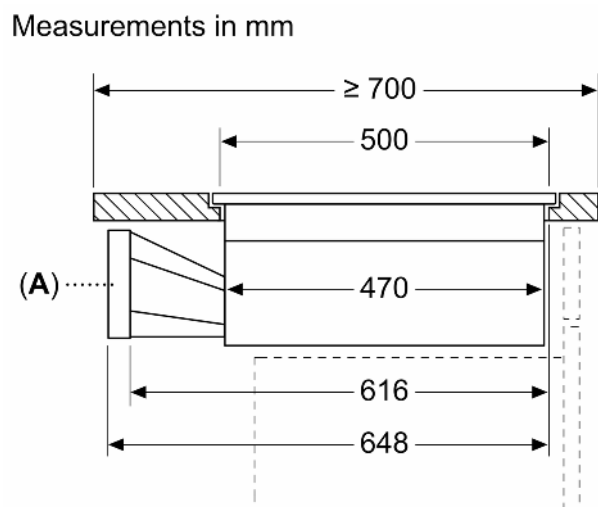


A: Adapter round-flat

measurements in mm
 Front view

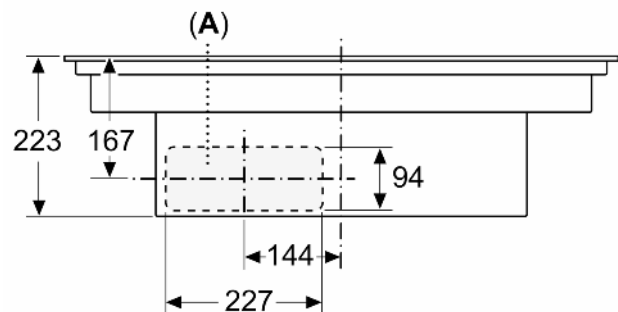


A: Connected directly at the rear

measurements in mm
Front view – unit cut-out
for unducted recirculation

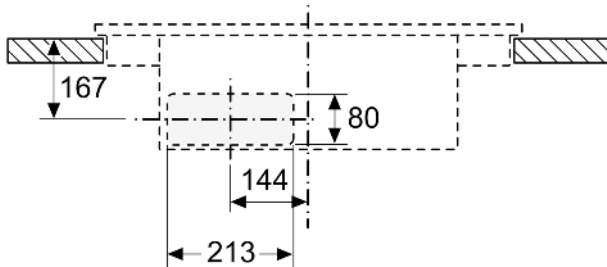

measurements in mm



When installing directly against outer walls that are not insulated ($\mu \geq 0.5 \text{ W/m}^2\text{°C}$), we recommend using partially or fully ducted recirculation configurations.

measurements in mm
Front view

